

CRC90

NSP3CT.PRO GMBH // 2025.10.29

CRAWLER



DEPLOYMENT RANGE:
DN100 TO DN300 (4" TO 12")

FULL HD BACKEYE CAMERA
(PICTURE-IN-PICTURE)

DIMENSIONS:
346 X 65 X 68 MM (13.6" X 2.6" X 2.7")

WEIGHT INCL. PLUG: **4.9 KG (10.8 LBS)**

6-WHEEL-DRIVE

FASTLOC SYSTEM FOR
QUICK WHEEL CHANGES (OPTIONAL)

PRESSURE-TIGHT UP TO **1 BAR**

LOCATION: 512 Hz, 640 Hz, 33 kHz

IP68 (DUST- AND WATERPROOF)

POWER SUPPLY VIA CABLE DRUM

TILT SENSOR, INCLINATION MEASUREMENT

INNER TEMPERATURE AND PRESSURE SENSOR


OPERATING TEMPERATURE:
0 °C TO 40 °C (32°F TO 104°F)

STORAGE TEMPERATURE:
-20 °C TO 60 °C (-4°F TO 140°F)

ACCESSORIES

RUBBER SCREW-ON WHEEL SET 55MM (2")

FILLING ADAPTER

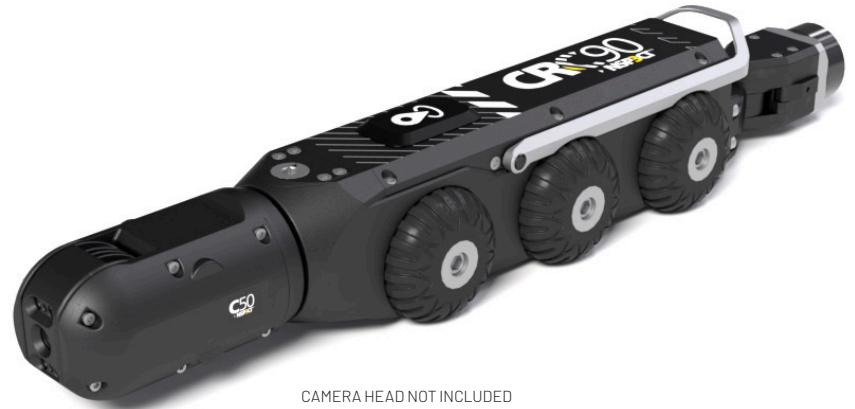

CAMERA HEAD NOT INCLUDED



INFORMATION | **ONLINE**



OUR SMALLEST CRAWLER.

FOR USE WITH C-SERIES FULL HD CAMERA HEADS AND CABLE DRUMS

NSP3CT^{PRO}