
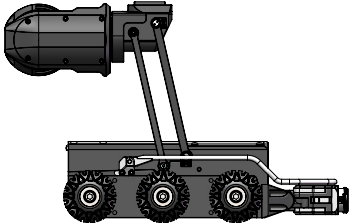

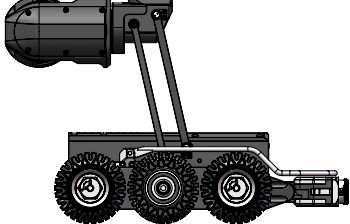


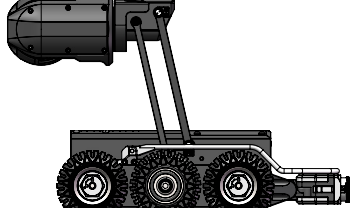


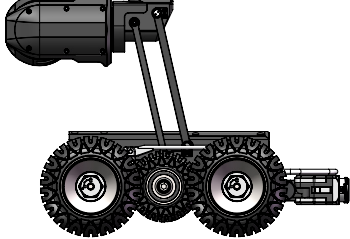
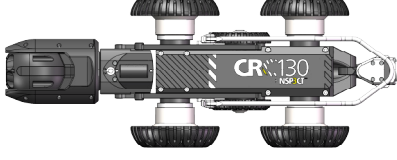

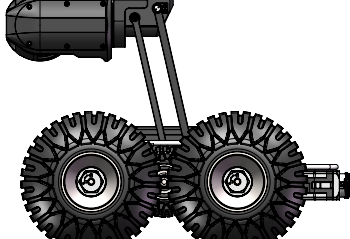


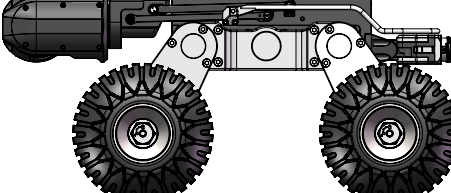
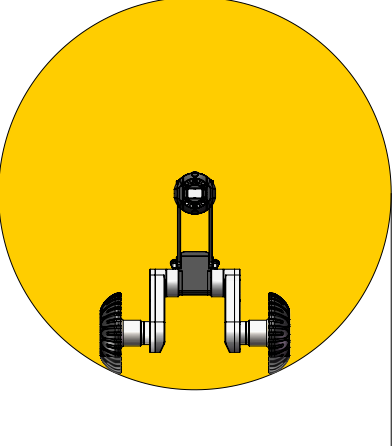
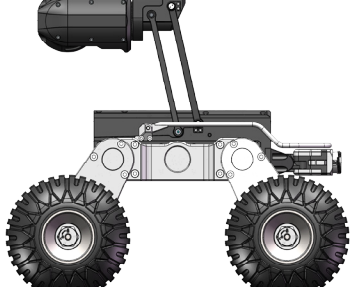
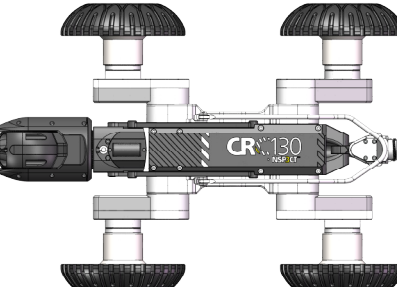


WHEEL GUIDE

DIAMETER (MM) E=EXTENDED T=THIN	MINIMUM ENVELOPE CIRCLE	MINIMUM PIPE DIAMAMETER AT CENTER (FRONT VIEW)	MINIMUM PIPE DIAMETER AT CENTER (SIDE VIEW)	MAXIMUM PIPE DIAMETER AT CENTER (FRONT VIEW)	MAXIMUM PIPE DIAMETER AT CENTER (SIDE VIEW)	TOP VIEW	SUITABLE FOR PIPE DIAMETER RANGE
65	 Ø 130mm	 Ø 146mm		 Ø 463mm			DN150-450
88 with middle wheel 88T	 Ø 165mm	 Ø 190mm		 Ø 493mm			DN200-450
125 with middle wheel 88T	 Ø 195mm	 Ø 223mm		 Ø 529mm			DN250-500
125E with middle wheel 88	 Ø 228mm	 Ø 250mm		 Ø 540mm			DN250-500
175E with middle wheel 88T	 Ø 296mm	 Ø 319mm		 Ø 601mm			DN300-600
175E with Carrier	 Ø 425mm	 Ø 565mm		 Ø 855mm			DN600-850